仕様

寸法	メートル制	ポンド制
最大動作高さ Ⓐ	5.05m	16ft 7in
最大プラットフォーム高さ Ⓑ	3.05m	10ft
全体長さ Ⓒ	1.33m	4ft 4in
全体幅 Ⓓ	0.77m	2ft 6in
全体高さ Ⓔ	1.60m	5ft 3in
プラットフォーム寸法(長さ×幅)	1.16m×0.57m	3ft 10in×1ft 10in
地面クリアランス(収納/上昇)	0.06m/0.016m	2in/1in
ホイールベース Ⓕ	0.95m	3ft 1in
回転半径(内側/外側)	0.45m/1.20m	1ft 6in/3ft 11in
タイヤ	φ200×80mm	φ200×80mm

性能		
安全動作負荷	230kg	507lb
最大乗員	1/0	1/0
最大登坂性能	25%	25%
最大移動速度(収納状態)	≯4.0km/h	≯2.49mph
最大移動速度(リフティング状態)	≯0.4km/h	≯0.25mph
最大許容動作角度	X-1.5°/Y-3°	X-1.5°/Y-3°
上昇/下降速度	20/20sec	20/20sec

重量		
全体重量(鉛酸電池)	570kg	1256lb
全体重量(リチウム電池)	540kg	1190lb

動力		
電池(鉛酸電池)	24V/55Ah	24V/55Ah
電池(リチウム電池)	24V/63Ah	24V/63Ah
充電器	24V/15A	24V/15A
駆動モータ	2×24V/0.6kW	2×24V/0.6kW
リフティングモータ	24VDC/1.4kW	24VDC/1.4kW

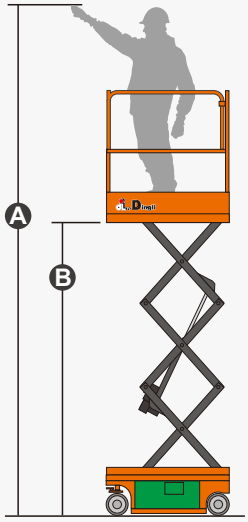





特徴

標準項目

- 比例ジョイスティックコントロール
- プラットフォームセルフロックゲート
- 一方向延伸プラットフォーム
- 全行程で走行
- ノンマーキングタイヤ
- 二輪駆動
- 二輪ステアリング
- 自動ブレーキシステム
- 緊急下降システム
- 故障診断システム
- 傾斜警報
- 作動ブザー
- ホーン
- 動作メータ
- 安全検査支持ロッド
- 標準輸送フォークリフト穴
- 充電保護システム
- フラッシュライト
- 折り畳み保護柵
- 自動ピットホール保護
- 運転確認
- 充電インジケータ
- 手動ブレーキリリース
- ランヤード接続ポイント
- 固定および起重吊りポイント
- 負荷検知システム
- 非常停止ボタン

ZHEJIANG DINGLI MACHINERY CO., LTD.
Address: No.188 Qihang Road,Deqing,Zhejiang P.R.C 313219
Telephone: +86(572)8681688
E-Mail: export@cndingli.com
Https://en.cndingli.com

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission.
2025-03